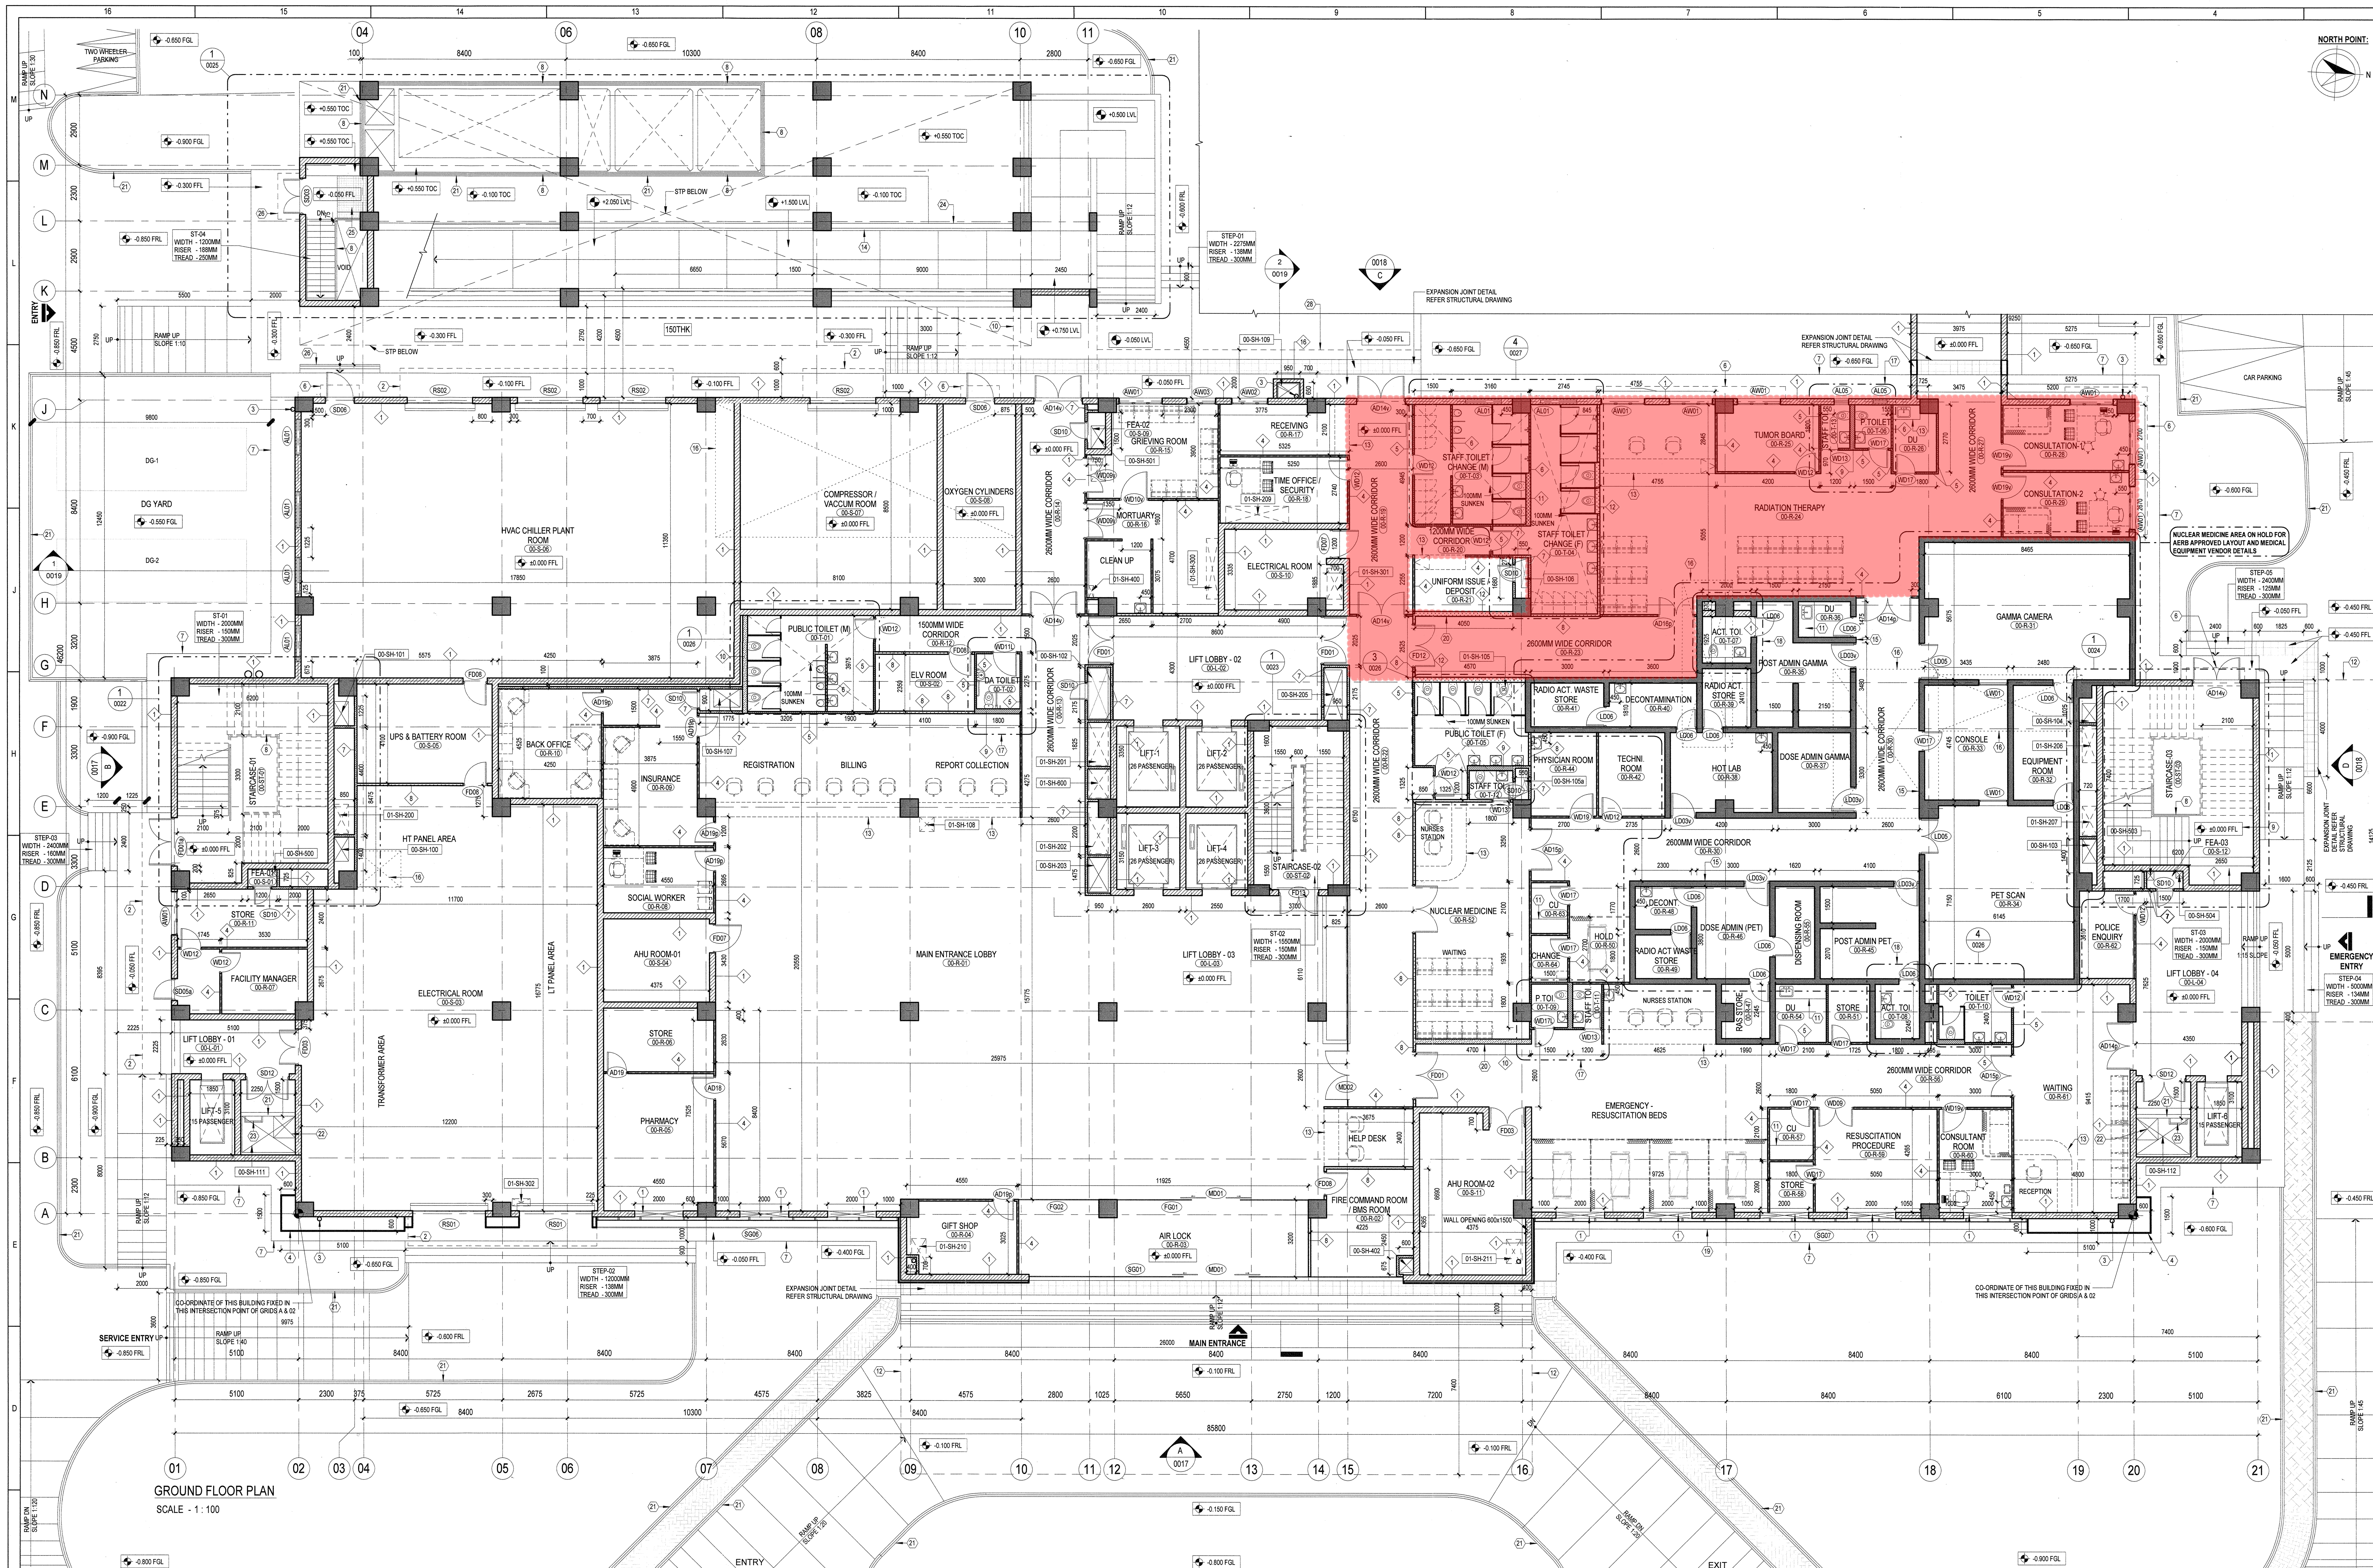

GROUND FLOOR PLAN

SCALE - 1 : 100

This drawing is the property of L&T Construction, B&F-EDRC and must not be passed on to any person or body not authorised by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

NORTH POINT:

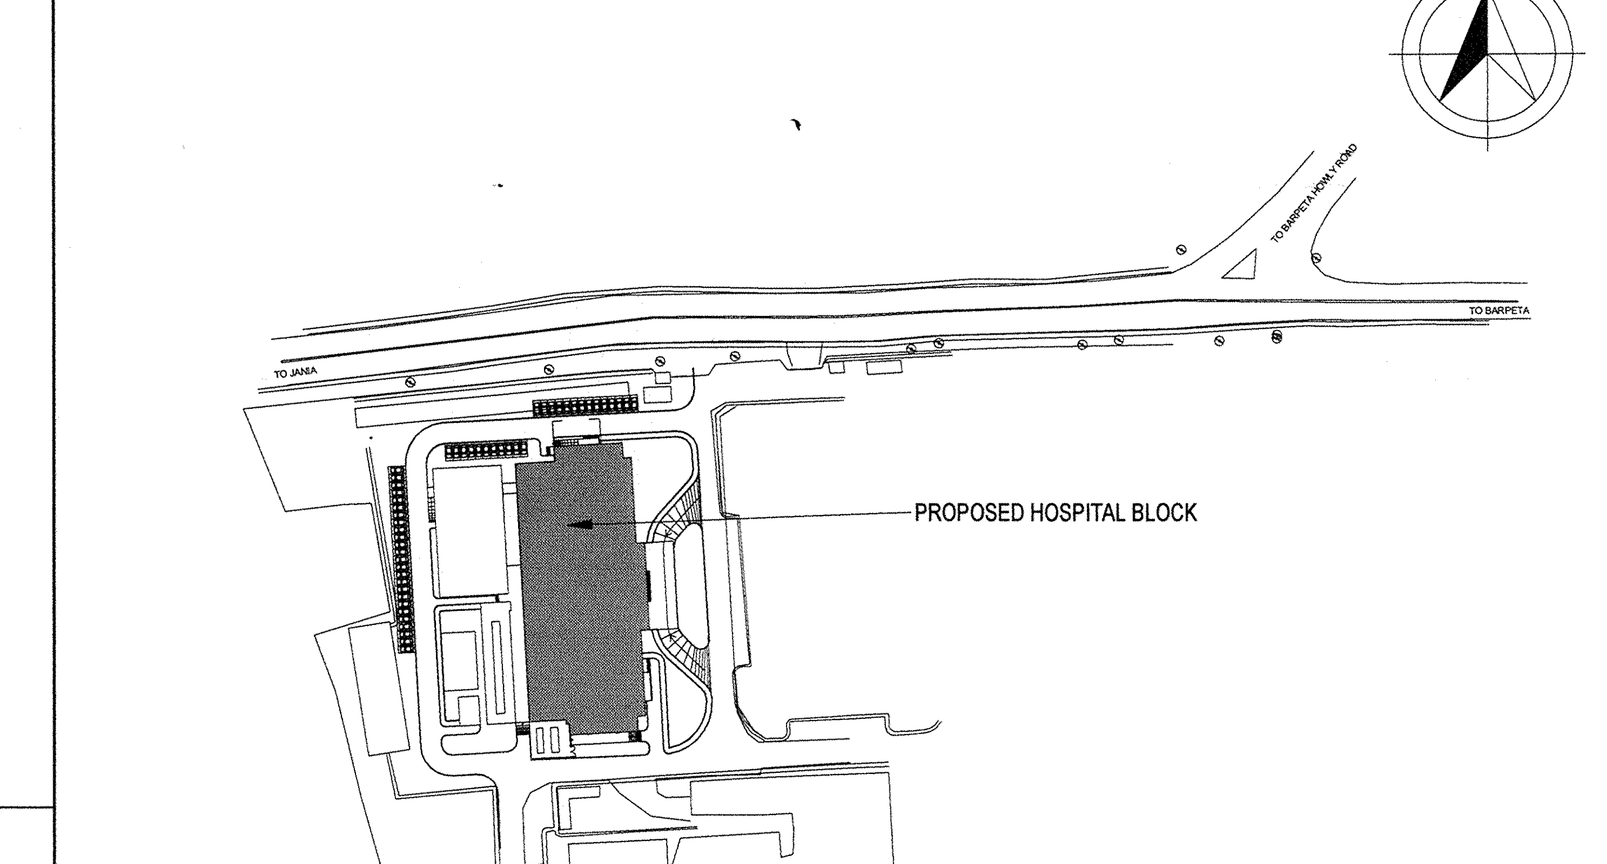

KEY NOTES :

1. 2000x1500 WALL OPENING AT 900MM SILL.
2. 1200MM WIDE SUNSHADE ABOVE.
3. RAIN WATER DOWN TAKE PIPE.
4. ACP CLADDING.
5. 2000x1500 WALL OPENING
6. 500MM WIDE SUNSHADE ABOVE.
7. SLAB PROJECTION REFER STRUCTURAL DRAWING.
8. M.S.HANDRAIL TO DETAIL.
9. 1800x1500 WALL OPENING AT 2300MM SILL.
10. CONNECTING CORRIDOR ABOVE.
11. COUNTER TO DETAIL.
12. CANOPY ABOVE (STELL WITH ACP CLADDING).
13. RECEPTION / NURSING TABLE.
14. RC PARAPET WALL.
15. RC WALL.
16. ROOF SLAB TO BE SUNKEN.
17. REFER STANRADED DRAWING FOR TOILET DETAILS.
18. REFER SEPARATE DRAWING FOR TOILET DETAILS.
19. SILL AT 900MM HIGH FROM FFL.
20. ELECTRICAL DB LOCATION.
21. 150MM THK. 150MM HIGH KERB WALL.
22. 900x900x600 PUMP PIT -2.725 TOC LEVEL.
23. M.S.LADDER DETAIL REFER STRUCTURAL DRAWING.
24. RC BEAM SEEN IN PLAN.
25. FINISH WITH CHECKER PLATE REFER STRUCTURAL DRAWING.
26. MOVABLE ALUMINIUM RAMP ACCESS TO SERVICE ENTRY.
27. 900MM WIDE SUNSHADE ABOVE.
28. CANOPY ABOVE (STEEL WITH POLYCARBONATE SHEET).

CLIENT SIGNATURE :

GENERAL NOTES :

01. ALL DIMENSIONS ARE IN MILLIMETERS & LEVELS IN METERS.
02. ±0.000FFL REFERS TO 49.450 LEVEL AT SITE.
03. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH THE ALL FLOOR PLANS, ELEVATIONS & SECTIONS O19035-A-HP-04-WD-0009 TO 0020.
04. JOINERY / STRUCTURAL GLAZING SHOWN IN PLAN ARE INDICATIVE, REFER HARDWARE SCHEDULE TEMPLATE FOR DETAILS.
05. FOR JOINERY, STAIRCASE, RAMP DETAILS, LIFTS, TOILETS, WALL SECTIONS, FLOORING PATTERN DETAILS, FURNITURE LAYOUTS & FALSE CEILING DETAILS REFER SEPARATE DRAWINGS.
06. FOR STRUCTURAL, PUBLIC HEALTH ENGINEERING, HVAC, ELECTRICAL, AND FIRE FIGHTING DETAILS REFER APPROPRIATE SEPARATE DRAWINGS.
07. AHU PEDESTAL DETAIL REFER STRUCTURAL DRAWING.
08. ALL EXTERNAL WALLS SHOULD BE BUILT UPTO SOFFIT OF BEAM OR CEILING.
09. LIFT WALL OPENING SIZES AND POSITIONING AS PER LIFT MANUFACTURER'S SPECIFICATION AND TO BE FOLLOWED AS PER THE APPROVED VENDOR DWG.
10. FOR TOILET DETAILS REFER STANDARD DRAWING.
11. FOR KITCHEN DETAILS REFER SEPARATE DRAWINGS.
12. ALL ROOF SLAB CUTOUTS INDICATED IN THIS DRAWING ARE TENTATIVE. REFER STRUCTURAL DRAWINGS FOR EXACT LOCATION.
13. ALL DIMENSIONS SHALL BE VERIFIED ON SITE PRIOR TO START OF WORK AND ANY DISCREPANCY SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECT AT EDRC.
14. ANY DISCREPANCY NOTICED SHALL BE BROUGHT TO THE ATTENTION OF THE CONSULTANTS WITHIN 7 WORKING DAYS OF RECEIVING THE DRAWING, PRIOR TO PROCUREMENT / EXECUTION OF WORK.
15. THE FURNITURE SHOWN IN THE DRAWING ARE INDICATIVE AND IS NOT IN L & T SCOPE OF WORK.

WALL LEGEND :

1. 250MM THK. BLOCK WALLS UP TO SOFFIT OF THE SLAB/BEAM.
2. 230MM THK BRICK WORK UP TO SOFFIT OF THE SLAB/BEAM.
3. 115MM THK BRICK WORK UP TO SOFFIT OF THE SLAB/BEAM.
4. DRY TO DRY WALL PARTITION From TOC to 100mm High TOP OF THE FALSE CEILING. *
5. DRY TO WET WALL PARTITION From TOC to 100mm High TOP OF THE FALSE CEILING. *
6. WET TO WET WALL PARTITION From TOC to 100mm High TOP OF THE FALSE CEILING. *
7. DRY TO DRY WALL PARTITION (SHAFT) UP TO SOFFIT OF THE SLAB/BEAM. *
8. DRY TO DRY WALL PARTITION (FIRE RATED) UP TO SOFFIT OF THE SLAB/BEAM. *
9. DRY TO WET WALL PARTITION (FOR TOILET) UP TO SOFFIT OF THE SLAB/BEAM. *
10. DRY TO DRY WALL PARTITION (FOR DB) UP TO SOFFIT OF THE SLAB/BEAM. *
11. WET TO WET WALL PARTITION (FOR TOILET) UP TO SOFFIT OF THE SLAB/BEAM. *
12. DRY TO DRY WALL PARTITION (FOR FIRE RATED) UP TO SOFFIT OF THE SLAB/BEAM. *

NOTE :

* ALL PARTITION SIZES SHALL BE AS PER FINALIZED VENDER DETAILS.

CUTOUT LEGEND:

- FLOOR CUTOUT
- ROOF CUTOUT

SUNKEN LEGEND:

- ROOF SLAB TO BE SUNKEN

LEGEND :

FRL	FINISHED ROAD LEVEL
FGL	FORMED GROUND LEVEL
FFL	FINISHED FLOOR LEVEL
FEA	FIRE EQUIPMENT AREA
TOC	TOP OF CONCRETE
LVL	LEVEL
TOI.	TOILET
ELV	EXTRA LOW VOLTAGE
PHE	PUBLIC HEALTH ENGINEERING
HVAC	HEATING VENTILATION AIR CONDITIONING
AHU	AIR HANDLING UNIT
LD	LEAD LINED DOOR
LW	LEAD LINED WINDOE
AL	ALUMINIUM LOUVER
AW	ALUMINIUM WINDOW
AD	ALUMINIUM DOOR
WD	WOODEN DOOR
FD	FIRE DOOR
ACT	ACTIVE
DECONT.	DECONTAMINATION
PET	POISTRON EMISSION TOMOGRAPHY
GAMMA	GAMMA CAMERA

FLOOR LEVEL — 00-SH-XXX — SHAFT TYPE / SERIAL NO. / SHAFT

SHAFT NO	SHAFT TYPE
1XX	PHE
2XX	HVAC
3XX	ELECTRICAL
4XX	ELV
5XX	FEA
6XX	MGPS

FLOOR LEVEL — 00-0-XXX — ROOM SERIAL NO / ROOM TYPE

ROOM TAG KEYNOTE:

- S - SERVICES
- T - TOILET
- L - LIFT LOBBY
- ST - STAIRCASE
- R - ROOMS

DOOR SCHEDULE - GROUND FLOOR

TAG	WIDTH	HEIGHT	COUNT
AD14p	2000	2100	2
AD14v	2000	2400	5
AD15p	1800	2100	2
AD16p	1500	2100	1
AD18	1000	2100	1
AD19	900	2100	1
AD19p	900	2100	5
FD01	2000	2100	4
FD01a	2000	2400	1
FD03	1500	2100	2
FD07	1200	2100	2
FD08	1000	2100	4
FD12	1800	2100	1
FD13	1650	2100	1
LD03v	1050	2100	5
LD05	1500	2100	2
LD06	850	2100	12
MD01	2700	2400	3
MD02	2000	2100	1
RS01	3000	3600	2
RS02	2700	3000	4
SD03	1500	2100	1
SD05a	900	2400	1
SD06	1200	2400	2
SD10	750	2000	7
SD12	1800	2100	2
WD09	1500	2100	1
WD09v	1500	2100	2
WD10v	1200	2100	1
WD11L	1050	2100	1
WD12	900	2100	11
WD13	750	2100	3
WD17	850	2100	9
WD17L	850	2100	1
WD19	1050	2100	1
WD19v	1050	2100	3

WINDOW / LOUVER SCHEDULE - GROUND FLOOR

TAG	WIDTH	HEIGHT	COUNT	SILL HEIGHT
AL01	1500	600	7	900
AL04	2400	600	1	900
AL05	600	600	2	900
AW01	1800	1500	8	
AW01L	1800	1500	1	
AW02	1500	1500	1	
AW03	1200	1500	1	
LW01	1200	1200	2	

STRUCTURAL GLAZING - GROUND FLOOR

TAG	WIDTH	HEIGHT	COUNT
FG02	3300	4900	1
FG01	7875	4900	1
SG01	15400	4900	1
SG07	20325	2700	1
SG06	12413	2700	1

SHAFT SCHEDULE - GROUND FLOOR

TAG	DESCRIPTION	LENGTH	WIDTH
00-SH-100	PHE SHAFT	600	1000
00-SH-101	PHE SHAFT	600	1000
00-SH-102	PHE SHAFT	800	2075
00-SH-103	PHE SHAFT	600	1000
00-SH-104	PHE SHAFT	600	800
00-SH-105a	PHE SHAFT	250	800
00-SH-106	PHE SHAFT	250	1200
00-SH-107	PHE SHAFT	1100	750
00-SH-109	PHE SHAFT	850	600
00-SH-111	PHE SHAFT	2200	1500
00-SH-112	PHE SHAFT	2200	1500
00-SH-203	HVAC SHAFT	800	1425
00-SH-205	HVAC SHAFT	750	2075
00-SH-402	ELV SHAFT	600	600
00-SH-500	FPS SHAFT	300	300
00-SH-501	FPS SHAFT	600	950
00-SH-503	FPS SHAFT	375	300
00-SH-504	FPS SHAFT	300	300

REVISIONS

REV.NO.	DESCRIPTION	DESIGNED		DRAWN		CHECKED		APPROVED	
0	RELEASED AS GOOD FOR CONSTRUCTION	ARKH	20.09.2019	TJR	20.09.2019	TI	30.10.2019	JA	03.10.2019

CHECKED BY	SIGN	DATE	CHECKED BY	SIGN	DATE	CHECKED BY	SIGN	DATE
ARCHITECTURE		03.10.19	HVAC		03/10/19	GIS		
CIVIL & STRUCTURAL		03.10.19	FPS		03/10/19	GEOTECH		
ELECTRICAL		03.10.19	PIPING		03/10/19	VHT		
ELV SYSTEM		03/10/19	PHE					

CLIENT :

ASSAM CANCER CARE FOUNDATION

L&T Construction — Buildings & Factories

PROJECT : Proposed Cancer Centre At 18 Locations In Assam For Assam Cancer Care Foundation & M/s. Tata Trusts

BARPETA CANCER CENTRE
(A Government of Assam and Tata Trusts Initiative)

PROJECT CONSULTANT: Engineering Design and Research Center (EDRC), L&T Construction - Buildings & Factories.

CONCEPT ARCHITECT: Engineering Design and Research Center (EDRC), L&T Construction - Buildings & Factories.

SUPPLIER / CONTRACTOR : Larsen & Toubro Limited, Construction, Buildings & Factories

JOB No : O19035

	NAME	SIGN	DATE
DSGN	ARKH		20.09.2019
DRWN	TJR		20.09.2019
CHKD	TI		30.10.2019
APPD	JA		03.10.2019

TITLE: HOSPITAL BLOCK — GROUND FLOOR PLAN

SECTION/ELEVATION MARKING — DRAWING NUMBER

PROJECTION: FIRST ANGLE

SCALE: As indicated — SIZE: A0 — REV: 0

DRAWING No. O19035 - A - HP - 04 - WD - 0009 — SHEET

RELEASED FOR: ☐ PRELIMINARY ☐ TENDER ☐ INFORMATION ☐ APPROVAL ☑ CONSTRUCTION