This drawing is the property of L&T Construction, B&F-EDRC and must not be passed on to any person or body not authorised by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

GROUND FLOOR PLAN

SCALE - 1 : 100

GENERAL NOTES :

01. ALL DIMENSIONS ARE IN MILLIMETERS & LEVELS IN METERS.
02. +0.000FFL REFERS TO +67.900 LEVEL AT SITE.
03. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH THE ALL FLOOR PLANS, ELEVATIONS & SECTIONS O19035-A-HP-06-WD-0008 TO 0015.
04. JOINERY / STRUCTURAL GLAZING SHOWN IN PLAN ARE INDICATIVE, REFER HARDWARE SCHEDULE TEMPLATE FOR DETAILS.
05. FOR JOINERY, STAIRCASE, RAMP DETAILS, LIFTS, TOILETS, WALL SECTIONS, FLOORING PATTERN DETAILS, FURNITURE LAYOUTS & FALSE CEILING DETAILS REFER SEPARATE DRAWINGS.
06. FOR STRUCTURAL, PUBLIC HEALTH ENGINEERING, HVAC, ELECTRICAL, AND FIRE FIGHTING DETAILS REFER APPROPRIATE SEPARATE DRAWINGS.
07. AHU PEDESTAL DETAIL REFER MEP DRAWING.
08. ALL EXTERNAL WALLS SHOULD BE BUILT UPTO SOFFIT OF BEAM OR CEILING.
09. LIFT WALL OPENING SIZES AND POSITIONING AS PER LIFT MANUFACTURER'S SPECIFICATION AND TO BE FOLLOWED AS PER THE APPROVED VENDOR DWG.
10. FOR TOILET DETAILS REFER STANDARD DRAWING.
11. ALL ROOF SLAB CUTOUTS INDICATED IN THIS DRAWING ARE TENTATIVE. REFER MEP & STRUCTURAL DRAWINGS FOR EXACT LOCATION.
12. ALL DIMENSIONS SHALL BE VERIFIED ON SITE PRIOR TO START OF WORK AND ANY DISCREPANCY SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECT AT EDRC.
13. ANY DISCREPANCY NOTICED SHALL BE BROUGHT TO THE ATTENTION OF THE CONSULTANTS WITHIN 07 WORKING DAYS OF RECEIVING THE DRAWING, PRIOR TO PROCUREMENT / EXECUTION OF WORK.
14. THE FURNITURE SHOWN IN THE DRAWING ARE INDICATIVE AND IS NOT IN L & T SCOPE OF WORK.

CUTOUT LEGEND:

FLOOR CUTOUT

ROOF CUTOUT

FLOOR LEVEL — 00-SH-XXX — SHAFT TYPE / SERIAL NO. / SHAFT

SHAFT NO	SHAFT TYPE
1XX	PHE
2XX	HVAC
3XX	ELECTRICAL
4XX	ELV
5XX	FEA

FLOOR LEVEL — 00-0-XXX — ROOM SERIAL NO. / ROOM TYPE

ROOM TAG KEYNOTE:

S - SERVICES
T - TOILET
L - LIFT LOBBY
ST - STAIRCASE

LEGEND :

FRL	FINISHED ROAD LEVEL	AHU	AIR HANDLING UNIT
FGL	FORMED GROUND LEVEL	LD	LEAD LINED DOOR
FFL	FINISHED FLOOR LEVEL	AL	ALUMINIUM LOUVE
FEA	FIRE EQUIPMENT AREA	AW	ALUMINIUM WINDO
TOC	TOP OF CONCRETE	AD	ALUMINIUM DOOR
LVL	LEVEL	WD	WOODEN DOOR
TOI.	TOILET	FD	FIRE DOOR
ELV	EXTRA LOW VOLTAGE	ACT	ACTIVE
PHE	PUBLIC HEALTH ENGINEERING		
HVAC	HEATING VENTILATION AIR		

KEY NOTES :

1. 1200MM WIDE SUNSHADE ABOVE.
2. 900MM WIDE SUNSHADE ABOVE.
3. RAIN WATER DOWN TAKE PIPE.
4. ACP CLADDING.
5. 2600X2100 WALL OPENING.
6. 600MM WIDE SUNSHADE ABOVE.
7. SLAB PROJECTION REFER STRUCTURAL DRAWING.
8. M.S.HANDRAIL TO DETAIL.
9. S.S.HANDRAIL TO DETAIL.
10. CHAIN LINK FENCE GATE.
11. COUNTER TO DETAIL.
12. CANOPY ABOVE.
13. RECEPTION / NURSING TABLE.
14. REFER SEPARATE DRAWING FOR RAMP AND CONNECTING CORRIDOR DETAIL.
15. GRNITE CLADDING IN ELEVATION.
16. 10MM DROP FROM FINISH FLOOR LEVEL.
17. 150 MM THICK 150 MM HIGH KERB WALL .
18. DB LOCATION IN PLAN.
19. EXHAUST VENT PIPE.
20. COLLECTION PIT BELOW.
21. MAN HOLE REFER STRUCTURAL DRAWING.
22. 75 MM WIDE SLAB PROJECTION AT 1200MM HIGH FROM FFL ALL AROUND
23. RC PARAPET WALL FOR RAMP REFER STRUCTURAL DRAWING .
24. 800 X 2100 MM WALL OPEING.

WALL LEGEND :

1. 250MM THK. BLOCK WALLS UP TO SOFFIT OF THE SLAB/BEAM.
2. 150MM THK. BLOCK WALLS UP TO SOFFIT OF THE SLAB/BEAM.
3. DRY TO DRY WALL PARTITION From TOC to 100mm High TOP OF THE FALSE CEILING. *
4. DRY TO WET WALL PARTITION From TOC to 100mm High TOP OF THE FALSE CEILING. *
5. WET TO WET WALL PARTITION From TOC to 100mm High TOP OF THE FALSE CEILING.*
6. DRY TO WET WALL PARTITION From TOC to 200mm High TOP OF THE FALSE CEILING. *
7. DRY TO DRY WALL PARTITION (SHAFT) UP TO SOFFIT OF THE SLAB/BEAM. *
8. DRY TO DRY WALL PARTITION (FIRE RATED) UP TO SOFFIT OF THE SLAB/BEAM *.
9. DRY TO DRY WALL PARTITION (FIRE RATED) UP TO SOFFIT OF THE SLAB/BEAM. *
11. 230MMTHK BRICK WALL WALLS UP TO SOFFIT OF THE SLAB/BEAM.
12. WET TO WET WALL PARTITION From TOC to 100mm High TOP OF THE FALSE CEILING.*

NOTE :

*** ALL PARTITION SIZES SHALL BE AS PER FINALIZED VENDER DETAILS .**

SUNKEN LEGEND:

FLOOR SLAB TO BE SUNKEN BY GENERAL SUNKEN

SUNKEN MARKING LEGEND:

ROOF SLAB TO BE SUNKEN

CLIENT SIGNATURE :

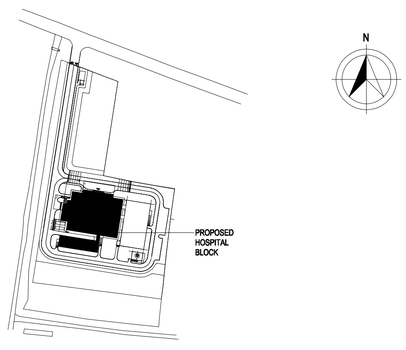

KEY PLAN
SCALE- (NTS)

REV.NO.	DESCRIPTION	DESIGNED		DRAWN		CHECKED		APPROVED	
0	RELEASED AS GOOD FOR CONSTRUCTION	ARUN	18.09.2019	SSV	18.09.2019	TI	03.10.2019	JA	04.10.2019

REVISIONS

CHECKED BY	SIGN	DATE	CHECKED BY	SIGN	DATE	CHECKED BY	SIGN	DATE
ARCHITECTURE			HVAC			GIS		
CIVIL & STRUCTURAL			FPS			GEOTECH		
ELECTRICAL			PIPING			VHT		
ELV SYSTEM			PHE					

CLIENT : ASSAM CANCER CARE FOUNDATION

L&T Construction — Buildings & Factories

PROJECT : Proposed Cancer Centre At 18 Locations In Assam For Assam Cancer Care Foundation & M/s. Tata Trusts

TEZPUR CANCER CENTRE
(A Government of Assam and Tata Trusts Initiative).

PROJECT CONSULTANT: Engineering Design and Research Center (EDRC), L&T Construction - Buildings & Factories.

CONCEPT ARCHITECT: Engineering Design and Research Center (EDRC), L&T Construction - Buildings & Factories.

SUPPLIER / CONTRACTOR : Larsen & Toubro Limited, Construction, Buildings & Factories

JOB No : O19035

	NAME	SIGN	DATE
DSGN	ARUN		18.09.2019
DRWN	SSV		18.09.2019
CHKD	TI		03.10.2019
APPD	JA		04.10.2019

TITLE:

HOSPITAL BLOCK

GROUND FLOOR PLAN

SECTION/ ELEVATION MARKING — DRAWING NUMBER

SCALE: As indicated

DRAWING No. O19035 - A - HP - 06 - WD - 0009

SHEET:

PROJECTION: FIRST ANGLE

SIZE: A0 | REV: 0

RELEASED FOR: ☐ PRELIMINARY ☐ TENDER ☐ INFORMATION ☐ APPROVAL ☑ CONSTRUCTION